
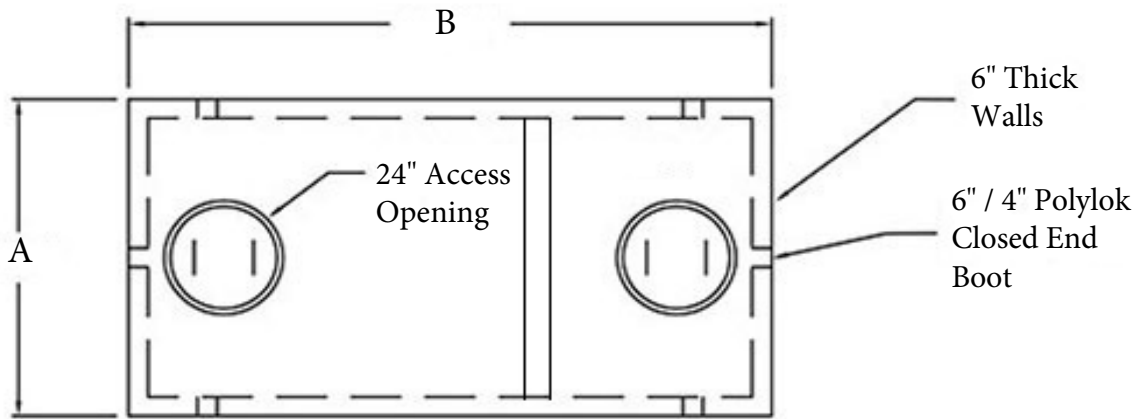


# Grease / Oil Interceptor

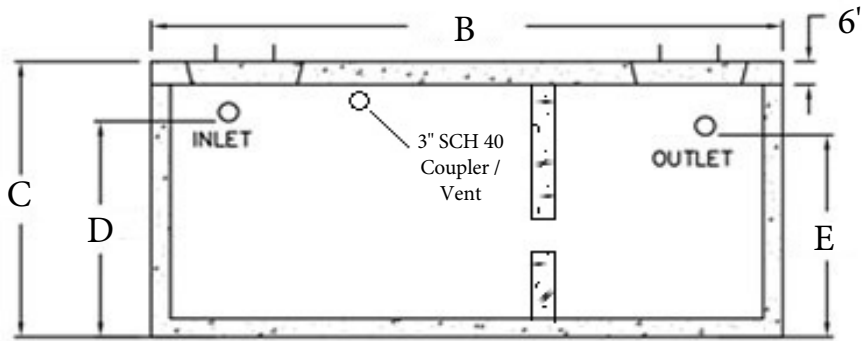

| ? aWW<br>(Gallons) | I [MZ<br>6L žž3Š | >WYZ<br>6L žž4Š | AHMS^<br>: WZf<br>6L žž5Š | ;`W<br>6L žž6Š | AgfW<br>6L žž7Š | I WZf  |
|--------------------|------------------|-----------------|---------------------------|----------------|-----------------|--------|
| 1250               | 74"              | 102"            | 96"                       | 66"            | 64"             | 21600# |
| 1500               | 74"              | 102"            | 96"                       | 72"            | 70"             | 21600# |
| 1750               | 74"              | 102"            | 96"                       | 77"            | 75"             | 21600# |

- Single Compartment & Dual Compartment Options Available
- Customizable Options
- Interior Coated w/ Conseal CS-55 Water Based Acrylic Coating for Culinary Grease Application
- Interior Coated w/ Conseal CS-90 Fuel Resistant Epoxy Coating for Fuel/Oil Application

Grease Interceptors Are Manufactured To ASTM Specifications

Diamond Precast reserves the right to make changes to product design without notice. Please contact Diamond Precast whenever necessary for confirmation or advice on product design.

